



# PRODUCT MANUAL

## ELECANÉ SMALLEST BARK COLLAR

MODEL DC-656

Thank you for purchasing the Elecane Bark Collar.

The product has been specially developed for small dogs and their owners.

Dear dog lovers, our company and its employees love pets and don't want to do any harm to them. That's why only **humane ways** of influence, such as sound warning and vibration, are used in our **bark correction collars**.

Based on different testing models of the **Elecane**, it achieves an efficiency of **75-80%** with the dogs that **stopped barking** within **one week**. **10-15%** of dogs need up to **two weeks**, and about 5% of dogs need more time. Unfortunately, 3-5% of dogs aren't susceptible to bark correction through exposure to sound and vibration.



## IMPORTANT!

If our product didn't help you solve the problem with excessive barking, don't hesitate to contact our support team at [support@elecane.com](mailto:support@elecane.com), and we will help you or reimburse the purchase.

## PRINCIPLE OF OPERATION

The main element of the **Elecane** bark collar is the sensor. It **recognizes** and detects your dog's throat vibration (barking).

The **sensor detects** barking, and the collar is activated, affecting the dog with a vibro-sound warning.

## IMPORTANT!

The impact of the collar on each dog can vary as each dog has a **different level** of sensitivity to it, and it also depends on **the sensitivity, thickness, and structure** of the **skin, fat, muscles, nervous excitability**, etc.




In accordance with the requirements of **humanity** the Elecane Bark Collar has a **special system** of restrictions for the duration and intensity of exposure to the dog.





## LEVELS OF

# CORRECTION

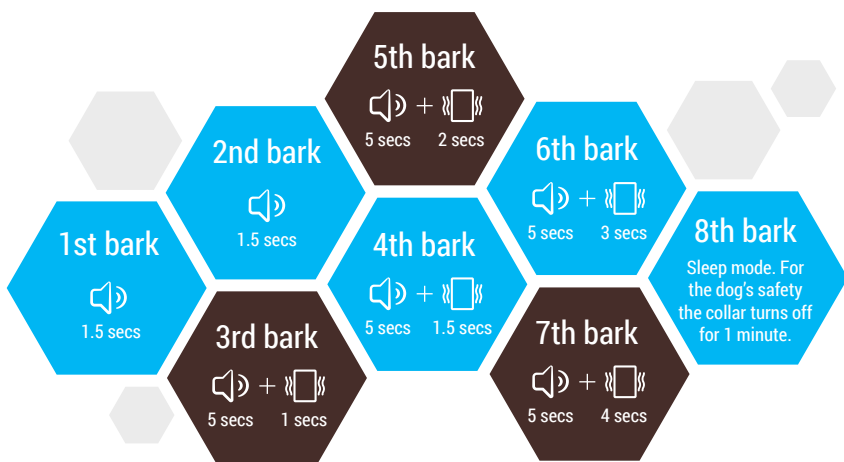

**1st bark:** sound for 1.5 seconds

**2nd bark:** sound for 2.5 seconds

**3rd bark:** sound for 5 seconds + vibration for 1 second

**4th bark:** sound for 5 seconds + vibration for 1.5 seconds

**5th bark:** sound for 5 seconds + vibration for 2 seconds

**6th bark:** sound for 5 seconds + vibration for 3 seconds

**7th bark:** sound for 5 seconds + vibration for 4 seconds


**8th bark:** Sleep mode. For the dog's safety the collar turns off for 1 minute.

## IMPORTANT!


1. The collar moves to the next correction level **consistently** and only if the dog **continues to bark**. If the dog does not bark for **30 seconds**, the collar returns to **the first correction level**.
2. After 'sleep mode' activation, the collar returns to **the first correction level**.

## DEVICE

# OVERVIEW

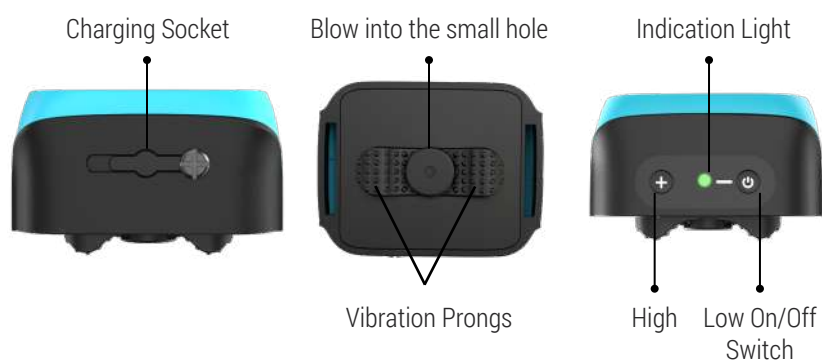




## IMPORTANT!

To turn ON/OFF the collar, press the  button for 3 seconds still until the collar beeps and the indicator lights up.



# THE FIRST USAGE

For the collar to start working:

1. To charge collar 1.5-2 hours.
  2. Turn on the collar before use. Press  the button and hold for 3 seconds. The collar will beep, and the indicator will turn green.
  3. Set the collar's sensitivity to position 4. Press the button  a short while until the collar ceases to emit a signal when the button is pressed. It will be the mode of the lowest sensitivity of the collar. Then press the button.  three times, which will be mode 4.
- Each time you press the button, the collar will sound like a beep, so you know that the mode has switched. Adjust the sensitivity if necessary.



## How to put a collar on a dog:

1. **Check whether the collar fits tightly or not.** If necessary, adjust it. You must cut the excess strap.
2. **Install the collar block in the middle of the strap.** Note that the collar block moves along the strap as you pull on it.
3. **You must put the collar on the dog so the block is in the center of the throat.** The collar reacts to the vibration of the throat when the dog barks.

## IMPORTANT!

Read on for more details and features of use!

## CHARGING

# INSTRUCTION

The collar **needs to be charged** when the **red light** continues flashing slowly for **30sec** and then turns off automatically.

1. Open the Battery Charging Rubber Cover on the Anti Bark Collar, plug one end of the cable in the charging port and connect the other end **to the adaptor, computer, notebook, or power bank.** (Note: please make sure that the adaptor output is 5V/500 - 1000mAh.)
2. Plug the Lithium Polymer Charger into an electrical power outlet of standard household voltage (110-230V) based on your local standard.
3. The red light will be steady when fully charged within **1.5 to 2 hours.** It turns green light when charged fully.



**Charging time: 1.5-2 hours**

**Work time:** The battery charge lasts up to **14 days** with ordinary use.

**Time of non-stop working: 6-7 hours**



## IMPORTANT!

The **work time** of the battery can vary depending on the frequency of the collar activation.

# TESTING THE COLLAR BEFORE USING

Take the collar in your hands, facing the **back side** of the collar, and gently **blow** a small puff of air towards the small hole between the vibration prongs. You will hear **a sound**.

**Blow** a puff of air again. You will hear the **second sound**.

Blow for the third time, and you will hear **a sound and feel a mild vibration** (similar to the cell phone vibration).

Press and hold for 3 seconds



Adjust sensitivity

Press ⊖ ⊕ to adjust the sensitivity



Blowing into a small hole

🔊 Sound 📳 Vibrate



You may continue to do this till the **7th correction level** is reached.





## ADJUSTING THE SENSITIVITY

There are **two** **BUTTONS**  $\oplus$   $\ominus$  , which are used to **adjust the sensitivity**.

The **higher** the **sensitivity** level is, the **easier** it is to **trigger** the collar.

Press the button  $\ominus$  for a short while until the collar ceases to emit a signal when the button is pressed. It will be the **mode of the lowest sensitivity** of the collar (the 1st). Then press the button  $\oplus$  three times, which will be mode 4.

**Each time you press the button, the collar will sound like a beep, so you know that the mode has switched.**





It would be best if you found the **sensitivity level** of your dog by **experimentation**.

After turning off and turning back on the collar your settings will remain.

## PUT THE COLLAR ON THE DOG

### IMPORTANT!

The correct placement and settings of the collar are essential for its effective work.

1. If the icon is blinking, the battery is not charged. Please charge the device.
2. Put the dog in a comfortable position that allows you to apply the collar correctly.
3. Install the collar receiver (main body) in the middle of the strap. Note that the collar receiver moves along the strap as you pull on it. Put the collar on your dog - high under the jaw and tighten the strap. The collar's receiver must be located precisely in the middle of the neck, one inch below your dog's Adam's apple.
4. For your dog's comfort in wearing the collar, please adjust the strap correctly. Put the collar on the dog, and leave a couple of inches so that the collar will fit your dog's neck as it grows or has thick fur. Then take it off, cut off the excess and burn the cut with fire for a couple of seconds. For your pet's safety, please do it out of your dog's reach.
5. If the dog's hair on the throat is long, it must be shortened for the collar to work correctly.




6. Let your dog wear the collar for a couple of minutes and then check again if it fits well. When the dog gets used to the collar, double-check the correct placement of the collar.

## IMPORTANT!

If you don't tighten the strap tight enough, it won't work correctly. There will be no contact, besides, it can rub the dog's neck. To check the collar's fit, insert your finger between the end of the contact points and the dog's neck. The finger should be snug, but the dog should not experience breathing problems. In some cases, it may be necessary to shorten the fur around the contact point for direct contact.



## **How to turn ON/OFF on the collar?**

To turn ON/OFF the collar, press the  button for 3 seconds still until the collar beeps and the indicator lights up.

## **Is the collar waterproof?**

Yes, it is. You can use the collar in any weather condition.

## **Is the collar rechargeable, or do I need batteries?**

The current model of the bark collar is rechargeable. Use the USB cable with the device and charge it via PC, laptop, or adapter.

## **I've got two dogs. If I use the bark collar with one dog, will it activate when the other dog barks?**

No, it won't. The bark collar has a special protection system from false detection, and the sensor detects and recognizes the throat vibration of the dog to which it is initially set.

## **My dog barks, but the collar is not activated. Why?**

Check the battery and perform a full test. If the collar tests correctly, you will need to either increase the sensitivity level by pressing to make it easier to activate or tighten the collar as it might be too loose.

## **IMPORTANT!**

If our product didn't help you solve the problem with excessive barking, don't hesitate to contact our support team at [support@elecan.com](mailto:support@elecan.com), and we will help you or reimburse the purchase.

